


## **Fitting Instructions:**

1. Remove the rear upper cast arm form the car and remove both the original bushes including the outer shells.

- 2. Clean the bores of the arm removing any dirt or corrosion.
- 3. The bushes fit with the lip of the bush facing towards the centre of the arm (see fig 2).
- 4. Grease the bores of the bushes and both end faces. Push the stainless steel sleeves into the bushes.
- 5. Fit the arm back onto the car, fit the larger washers between the larger diameter of the bush and the tube of the car. Place one of the smaller washers on the bolt, fit the bolt then place the other small washer on the bolt before replacing the nut.
- 6. Refit the arm and tension all hardware to manufacturers recommended toque settings.

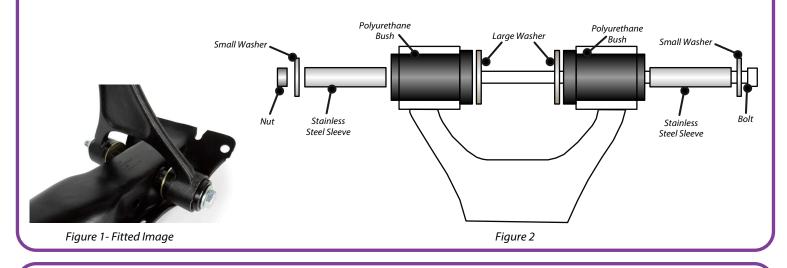

sales@powerflex.co.uk

**POWERFLEX** 

www.powerflex.co.uk